

# WORKSTEAD

INSTALLATION INSTRUCTIONS | BRICK III

---



### GENERAL NOTES

This luminaire is UL, cUL, and CE listed for installation in dry or damp locations.

When installing luminaire, conform to all applicable local electrical codes, ordinances, and the National Electrical Code (NEC).

For your safety and the proper operation of this luminaire, read and understand all instructions completely before commencing installation of this luminaire.

Carefully unpack the luminaire and inspect for damage.

Use the enclosed gloves when handling the luminaire.

This product is rated for three (3) 10W max E12 corn cob bulbs (or E14 corn cob bulbs, depending on your location).

Save these instructions for future reference.

### CAUTION











This product should be installed only by a licensed electrician.

### WARNING

The electricity must be turned off at the main fuse box before installing this luminaire. Turning power off using the light switch may not be sufficient to prevent electrical shock.

Use UL listed wire nuts for all wiring connections in this luminaire. Wrap wire nut connections with UL listed electrical tape.

### INCLUDED COMPONENTS FOR INSTALLATION

	(1) ceramic luminaire body
	(1) backplate
	(1) mounting plate
	(3) matte opal glass globes w/globe retainer
	(3) metal retainer rings
	(3) E12/E14 bulbs
	(2) 1-1/2" #8 x 32 machine screws
	(2) 1/2" #8 x 32 set screws
	(3) wire nuts
	(1) Allen wrench

### ASSEMBLY AND MOUNTING INSTRUCTIONS

#### STEP 1 | CUT POWER

Shut off the main electrical supply to the junction box from the fuse box/circuit breaker. Turning power off at the switch is not sufficient.

#### STEP 2 | ATTACH MOUNTING PLATE

Locate the junction box in the wall. Attach the mounting plate provided to the junction box using the 1-1/2" #8 x 32 machine screws provided. Ensure the bent flanges of the mounting plate are facing away from the wall. (Fig. 1)

#### STEP 3 | CONNECT WIRES

While holding the backplate near the mounting plate, make electrical connections using the wire nuts provided by following the electrical configuration table. (Fig. 2) Ensure that all electrical connections are wrapped with UL listed electrical tape.

#### STEP 4 | ATTACH BACKPLATE

Slip the backplate over the mounting plate and secure with provided set screws using the Allen wrench provided. (Fig. 3)

#### STEP 5 | ATTACH BODY

Slip the ceramic body over the sockets and secure the body to the backplate by threading the metal retainer rings onto the sockets. Ensure the wide flange end of the retainer rings sit flush against the ceramic body. (See Fig. 4 on page 4)

#### STEP 6 | INSTALL BULBS

Install the bulbs provided. Return power to the luminaire to ensure proper function. Once proper function is confirmed, turn off power again before installing the glass.


Fig. 1



Fig. 2

FROM SUPPLY	TO LUMINAIRE
Connect black or red (hot) house supply circuit wire to:	Luminaire black wire (hot)
Connect white (neutral) house supply circuit wire to:	Luminaire white wire (neutral)
Connect green insulated or bare copper (ground) house supply circuit wire to:	Luminaire bare copper wire (ground)

Fig. 3

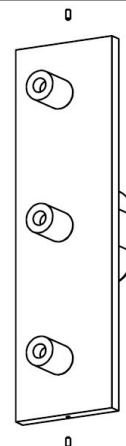

### ASSEMBLY AND MOUNTING INSTRUCTIONS

#### STEP 7 | INSTALL GLASS

Thread the glass onto the sockets until the glass is snug against the front face of the metal retainer rings. CAUTION: DO NOT OVERTIGHTEN. Return power to the luminaire.

Fig. 4

