WORKSTEAD

INSTALLATION INSTRUCTIONS | INDUSTRIAL CHANDELIER

WORKSTEAD

INSTALLATION INSTRUCTIONS | INDUSTRIAL CHANDELIER

GENERAL NOTES

This luminaire is UL, cUL, and CE listed for installation in dry or damp locations.

When installing luminaire, conform to all applicable local electrical codes, ordinances, and the National Electrical Code (NEC).

For your safety and proper operation of luminaire, read and understand all instructions completely before commencing installation of this luminaire.

Carefully unpack the luminaire and inspect for damage.

Use the enclosed gloves when handling the luminaire.

This product is rated for three (3) 60W max E26 G25 bulbs (or E27 G80 bulbs, depending on your location).

NOTE: LAYING THE LUMINAIRE ON A SOFT SURFACE TO CONFIGURE THE ARMS IN THEIR DESIRED LOCATION AND ATTACH THE CLAMPS IS RECOMMENDED. FINAL ADJUSTMENTS CAN BE MADE AFTER INSTALLATION (SEE STEP 11).

Save these instructions for future reference.

CAUTION

This product should be installed only by a licensed electrician.

WARNING

The electricity must be turned off at the main fuse box before installing this luminaire. Turning power off using the light switch may not be sufficient to prevent electrical shock.

Use UL listed wire nuts for all wiring connections in this luminaire. Wrap wire nut connections with UL listed electrical tape.

INCLUDED COMPONENTS FOR INSTALLATION

	(1) luminaire body with (3) wired arms
	(2) small clamps
	(2) large clamps
	(1) mounting plate
	(3) E26/E27 bulbs
	(2) acorn nuts
	(4) 1-1/2” #8 x 32 machine screws
	(3) wire nuts

WORKSTEAD

INSTALLATION INSTRUCTIONS | INDUSTRIAL CHANDELIER

ASSEMBLY AND MOUNTING INSTRUCTIONS

STEP 1 | CUT POWER
Shut off the main electrical supply to the junction box from the fuse box/circuit breaker. Turning power off at the switch is not sufficient.

STEP 2 | "ARM TO STEM"
Loosen the large three-ball knob on one of the large clamps provided to open the clamp, slide the clamp over the stem, and re-tighten the knob to secure the clamp to the stem. *(Fig. 1).*

STEP 3 | "ARM TO STEM"
Loosen the small wingnut on the large clamp installed in Step 2 to open the clamp. Feed the wiring from one of the arms through the open clamp, slide the arm into the clamp, and re-tighten the wingnut to secure the arm in the clamp. *(Fig. 2)*

STEP 4 | "ARM TO ARM"
Loosen the large three-ball knob on one of the small clamps provided to open the clamp, slide the clamp over the first arm (installed in Step 3), and re-tighten the knob to secure the clamp to the arm. *(Fig. 3).*

STEP 5 | "ARM TO ARM"
Loosen the small wingnut on the small clamp installed in Step 4 to open the clamp. Feed the wiring from the second arm through the open clamp, slide the arm into the clamp, and retighten the small wingnut to secure the arm in the clamp. *(See Fig. 4 on page 4)*

STEP 6 | ATTACH REMAINING ARMS
Attach the remaining arms. Multiple configurations are possible:
- If attaching "arm to stem," repeat Steps 2 and 3.
- If attaching "arm to arm," repeat Steps 4 and 5.
- NOTE: REGARDLESS OF CONFIGURATION, THERE WILL BE ONE EXTRA CLAMP REMAINING.

Fig. 1

Fig. 2



Fig. 3

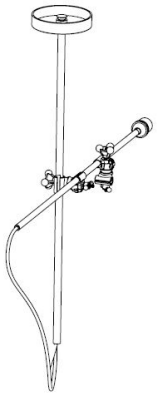

WORKSTEAD

INSTALLATION INSTRUCTIONS | INDUSTRIAL CHANDELIER

ASSEMBLY AND MOUNTING INSTRUCTIONS

STEP 7 | ATTACH MOUNTING PLATE
Install (2) 1-1/2" #8 machine screws provided into the outer holes of the mounting plate, from the back side, to act as mounting studs. Locate the junction box in the ceiling. Attach the mounting plate to the junction box using (2) 1-1/2" #8 machine screws provided. *(Fig. 5)*

STEP 8 | CONNECT WIRES
Using the wire nuts provided, make electrical connections by following the electrical configuration table. *(Fig. 6)* Ensure that all electrical connections are wrapped with UL listed electrical tape.

STEP 9 | SECURE CANOPY
Carefully tuck the wiring into the junction box. Carefully align the two holes in the canopy with the mounting stud screws and slip the canopy over those screws. Attach and tighten the two acorn nuts provided to those screws to secure the luminaire to the ceiling. NOTE: Tighten acorn nuts by hand or using soft-touch pliers. *(See Fig. 7 on page 5)*

STEP 10 | INSTALL BULBS
Install the bulbs provided. Return power to the luminaire to confirm proper function. If further work is needed, be sure to turn off power to luminaire before proceeding.

STEP 11 | ADJUST ARMS
Slightly loosen the knobs on the clamps to rotate arms to the desired positions. Tighten all knobs once arms are in their desired positions *(Fig. 8)*

CAUTION: BE SURE TO FULLY LOOSEN BOTH ENDS OF THE CLAMP BEFORE MAKING ANY ADJUSTMENTS ON ANY ARM. ADJUST ONLY ONE ARM AT A TIME. DO NOT ADJUST ARMS WHILE CLAMP IS TIGHT OR THE FINISH MAY BE DAMAGED.

Fig. 4

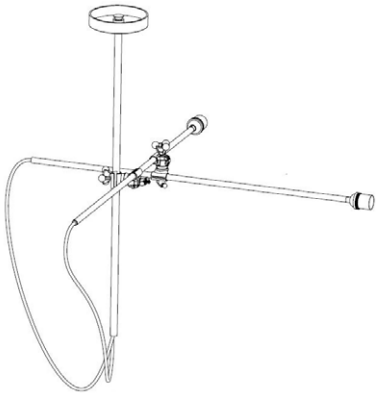

Fig. 5

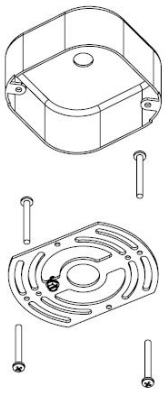

Fig. 6

FROM SUPPLY	TO LUMINAIRE
Connect black or red (hot) house supply circuit wire to:	Luminaire black wire (hot)
Connect white (neutral) house supply circuit wire to:	Luminaire white wire (neutral)
Connect green insulated or bare copper (ground) house supply circuit wire to:	Luminaire bare copper wire (ground)

ASSEMBLY AND MOUNTING INSTRUCTIONS

Fig. 7

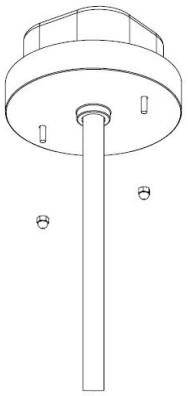
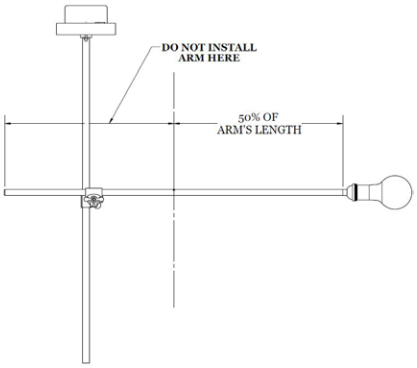
Fig. 8