

WORKSTEAD

INSTALLATION INSTRUCTIONS | LODGE PENDANT



WORKSTEAD



INSTALLATION INSTRUCTIONS | LODGE PENDANT

GENERAL NOTES

This luminaire is UL, cUL, and CE listed for installation in dry or damp locations.

When installing luminaire, conform to all applicable local electrical codes, ordinances, and the National Electrical Code (NEC).

For your safety and proper operation of luminaire, read and understand all instructions completely before commencing installation of this luminaire.

Carefully unpack the luminaire and inspect for damage.

Use the enclosed gloves when handling the luminaire.

This product is rated for three (3) 25W max E12 G16 bulbs (or E14 G50 bulbs, depending on your location).

Save these instructions for future reference.

CAUTION

This product should be installed only by a licensed electrician.

WARNING

The electricity must be turned off at the main fuse box before installing this luminaire. Turning power off using the light switch may not be sufficient to prevent electrical shock.

Use UL listed wire nuts for all wiring connections in this luminaire. Wrap wire nut connections with UL listed electrical tape.

INCLUDED COMPONENTS FOR INSTALLATION



(1) luminaire body



(1) mounting plate



(3) E12/E14 bulbs



(2) wood plugs



(4) 1-1/2" #8 x 32 machine screws



(3) wire nuts

ASSEMBLY AND MOUNTING INSTRUCTIONS

STEP 1 | CUT POWER

Shut off the main electrical supply to the junction box from the fuse box/circuit breaker. Turning power off at the switch is not sufficient.

STEP 2 | ATTACH MOUNTING PLATE

Locate the junction box in the ceiling. Attach the mounting plate to the junction box using (2) 1-1/2" #8 machine screws provided. (Fig. 1)

STEP 3 | CONNECT WIRES

Using the wire nuts provided, make electrical connections by following the electrical configuration table. (Fig. 2) Ensure that all electrical connections are wrapped with UL listed electrical tape.

STEP 4 | SECURE CANOPY

Tuck the wiring into the junction box. Carefully align the two holes in the canopy with the tapped holes in the mounting plate. Secure the canopy to the mounting plate using (2) 1-1/2" #8 machine screws provided. (Fig. 3)

STEP 5 | INSTALL BULBS

Install the bulbs provided. Return power to the luminaire to confirm proper function. If further work is needed, be sure to turn off power to luminaire before proceeding. Once proper function is confirmed, install wood plugs provided into holes in canopy.

NOTE: Install wood plugs only partially so that future removal is possible.

Fig. 1

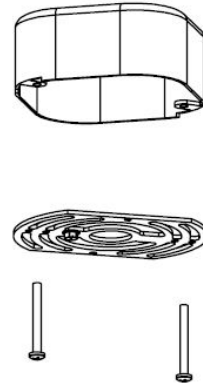


Fig. 2

FROM SUPPLY	TO LUMINAIRE
Connect black or red (hot) house supply circuit wire to:	Luminaire black wire (hot)
Connect white (neutral) house supply circuit wire to:	Luminaire white wire (neutral)
Connect green insulated or bare copper (ground) house supply circuit wire to:	Luminaire bare copper wire (ground)

Fig. 3

