

# WORKSTEAD

INSTALLATION INSTRUCTIONS | HOUSE SCONCE - HARDWIRED



# WORKSTEAD



## INSTALLATION INSTRUCTIONS | HOUSE SCONCE - HARDWIRED

---

### GENERAL NOTES

This luminaire is UL, cUL, and CE listed for installation in dry or damp locations.

When installing luminaire, conform to all applicable local electrical codes, ordinances, and the National Electrical Code (NEC).

For your safety and proper operation of luminaire, read and understand all instructions completely before commencing installation of this luminaire.

Carefully unpack the luminaire and inspect for damage.

Use the enclosed gloves when handling the luminaire.

This product is rated for one (1) 40W max E12 G16.5 bulb (or E14 G50 bulb, depending on your location).

Save these instructions for future reference.

### CAUTION

This product should be installed only by a licensed electrician.


### WARNING

The electricity must be turned off at the main fuse box before installing this luminaire. Turning power off using the light switch may not be sufficient to prevent electrical shock.

Use UL listed wire nuts for all wiring connections in this luminaire. Wrap wire nut connections with UL listed electrical tape.

### INCLUDED COMPONENTS FOR INSTALLATION

---



(1) luminaire body with shade



(1) mounting plate



(1) E12/E14 bulb



(2) Ø3/8" sphere nuts



(4) 1-1/2" #8 x 32 machine screws



(3) wire nuts

---

### ASSEMBLY AND MOUNTING INSTRUCTIONS

#### NOTE

Do not remove the plastic covering the shade until indicated to preserve the fabric.

#### STEP 1 | CUT POWER

Shut off the main electrical supply to the junction box from the fuse box/circuit breaker. Turning power off at the switch is not sufficient.

#### STEP 2 | ATTACH MOUNTING PLATE

Install (2) 1-1/2" #8 machine screws provided into the outer holes of the mounting plate, from the back side, to act as mounting studs. Ensure the placement of the mounting stud screws will align with the holes in the backplate. Locate the junction box in the ceiling. Attach the mounting plate to the junction box using (2) 1-1/2" #8 machine screws provided. (Fig. 1)

#### STEP 3 | CONNECT WIRES

Using the wire nuts provided, make electrical connections by following the electrical configuration table. (Fig. 2) Ensure that all electrical connections are wrapped with UL listed electrical tape.

#### STEP 4 | SECURE BACKPLATE

Tuck the wiring into the junction box. Carefully align the two holes in the backplate with the mounting stud screws and slip the canopy over those screws. Attach and tighten the two sphere nuts provided to those screws to secure the luminaire to the wall. NOTE: Tighten sphere nuts by hand or using soft-touch pliers. (Fig. 3)

#### STEP 5 | INSTALL BULB

Install the bulb provided. Ensure the plastic covering the shade is not touching the bulb. Return power to the luminaire to confirm proper function. If further work is needed, be sure to turn off power to luminaire before proceeding. Once proper function is confirmed, remove the plastic covering the shade.

Fig. 1

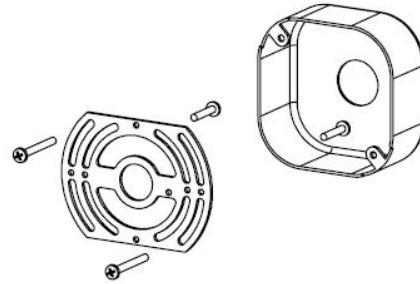


Fig. 2

FROM SUPPLY	TO LUMINAIRE
Connect black or red (hot) house supply circuit wire to:	Luminaire black wire (hot)
Connect white (neutral) house supply circuit wire to:	Luminaire white wire (neutral)
Connect green insulated or bare copper (ground) house supply circuit wire to:	Luminaire bare copper wire (ground)

Fig. 3

