WORKSTEAD

INSTALLATION INSTRUCTIONS | HIEROGLYPH SCONCE

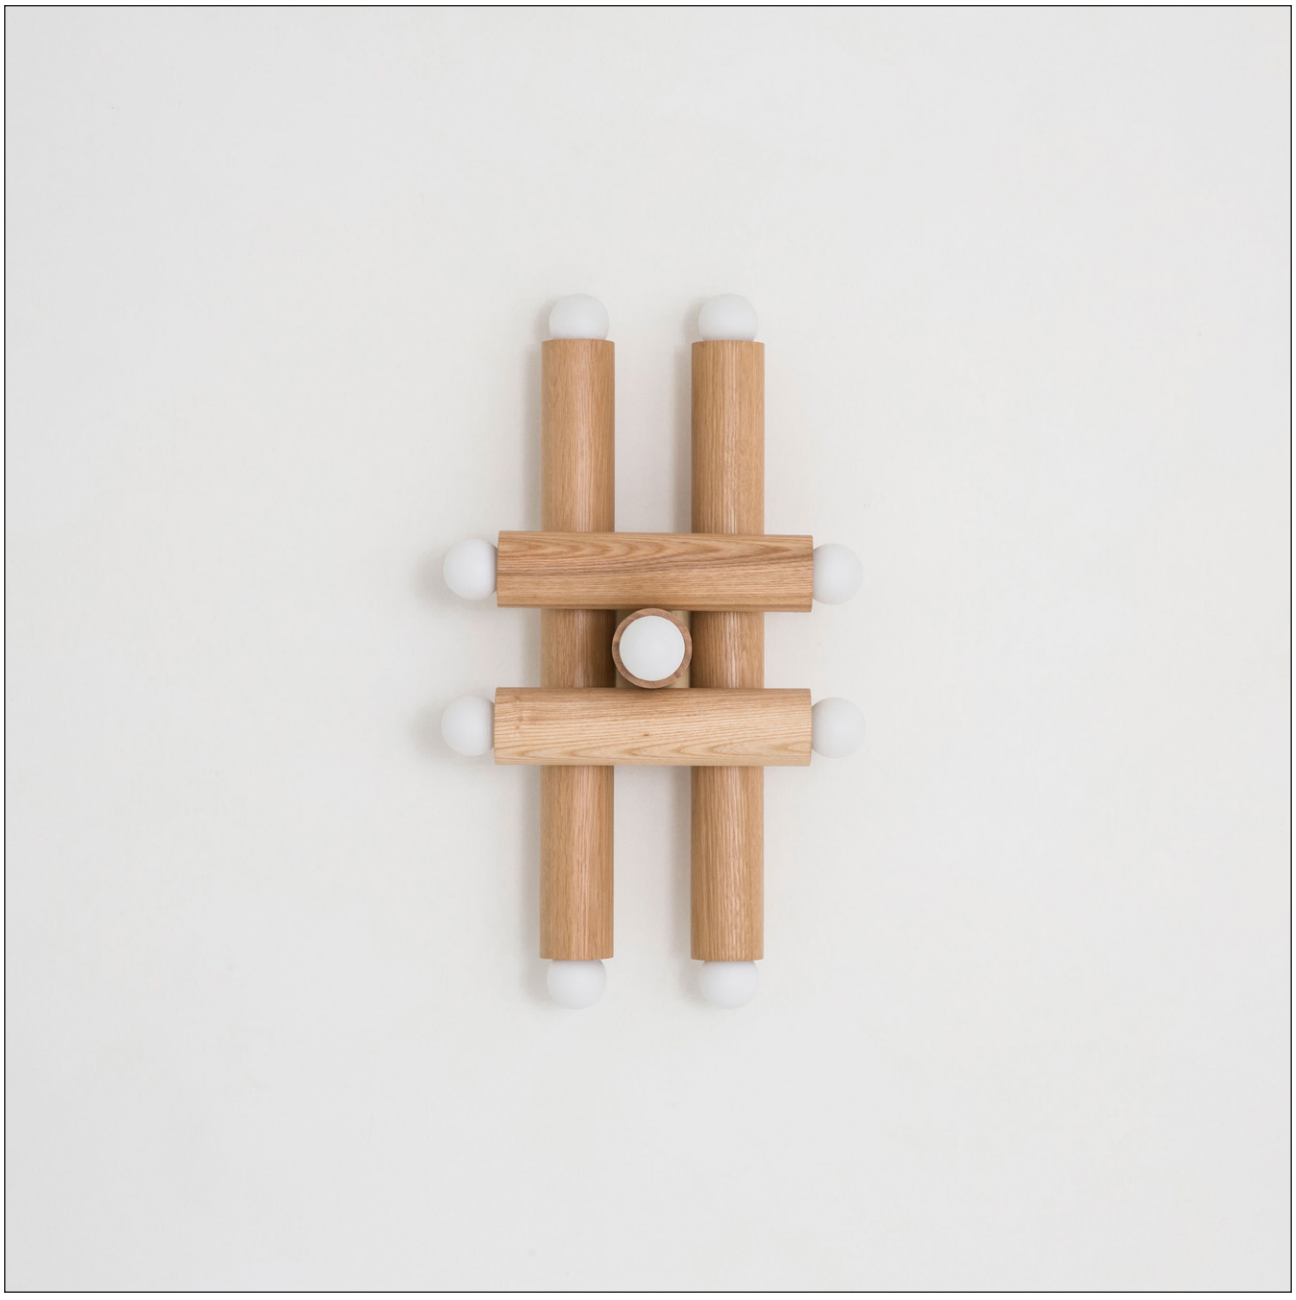

WORKSTEAD

INSTALLATION INSTRUCTIONS | HIEROGLYPH SCONCE

GENERAL NOTES

This luminaire is UL, cUL, and CE listed for installation in dry or damp locations.

When installing luminaire, conform to all applicable local electrical codes, ordinances, and the National Electrical Code (NEC).

For your safety and proper operation of luminaire, read and understand all instructions completely before commencing installation of this luminaire.

Carefully unpack the luminaire and inspect for damage.

Use the enclosed gloves when handling the luminaire.

This product is rated for nine (9) 25W max E12 G16 bulbs (or E14 G50 bulbs, depending on your location).

Save these instructions for future reference.

CAUTION

This product should be installed only by a licensed electrician.

WARNING

The electricity must be turned off at the main fuse box before installing this luminaire. Turning power off using the light switch may not be sufficient to prevent electrical shock.

Use UL listed wire nuts for all wiring connections in this luminaire. Wrap wire nut connections with UL listed electrical tape.

INCLUDED COMPONENTS FOR INSTALLATION

	(1) luminaire body
	(1) mounting plate
	(9) E12/E14 bulbs
	(2) 1-1/2” #8 x 32 machine screws
	(4) 1/2” #8 x 32 set screws
	(3) wire nuts

WORKSTEAD

INSTALLATION INSTRUCTIONS | HIEROGLYPH SCONCE

ASSEMBLY AND MOUNTING INSTRUCTIONS

STEP 1 | CUT POWER
Shut off the main electrical supply to the junction box from the fuse box/circuit breaker. Turning power off at the switch is not sufficient.

STEP 2 | ATTACH MOUNTING PLATE
Locate the junction box in the wall. Attach the mounting plate provided to the junction box using the 1-1/2" #8 x 32 machine screws provided. *(Fig. 1)*

STEP 3 | CONNECT WIRES
Using the wire nuts provided, make electrical connections by following the electrical configuration table. *(Fig. 2)* Ensure that all electrical connections are wrapped with UL listed electrical tape. Carefully tuck the wiring into the junction box.

STEP 4 | PREPARE BACKPLATE
NOTE: This luminaire can be mounted in either a horizontal or a vertical orientation. Based on desired orientation, locate the hole in the top of the backplate. Thread one of the set screws provided into the top hole until the set screw is flush with the outer edge of the backplate. In each of the remaining holes, thread in the other set screws provided until they are secure, but DO NOT thread them in fully yet.

STEP 5 | ATTACH BACKPLATE
Hook the top set screw onto the top folded tab of the mounting plate. Allow the backplate to rest flush with the wall. Thread the remaining set screws into their respective holes until they are flush with the outer edge of the backplate. *(Fig. 3)*

STEP 6 | INSTALL BULBS
Install the bulbs provided. Return power to the luminaire to confirm proper function. If further work is needed, be sure to turn off power to luminaire before proceeding.

Fig. 1

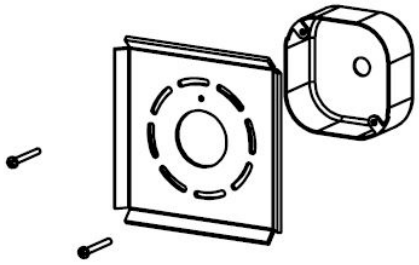

Fig. 2

FROM SUPPLY	TO LUMINAIRE
Connect black or red (hot) house supply circuit wire to:	Luminaire black wire (hot)
Connect white (neutral) house supply circuit wire to:	Luminaire white wire (neutral)
Connect green insulated or bare copper (ground) house supply circuit wire to:	Luminaire bare copper wire (ground)
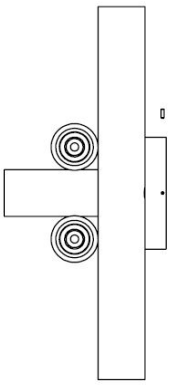
Fig. 3