WORKSTEAD

INSTALLATION INSTRUCTIONS | PARK II

WORKSTEAD

INSTALLATION INSTRUCTIONS | PARK II

GENERAL NOTES

This luminaire is UL, cUL, and CE listed for installation in dry or damp locations.

When installing luminaire, conform to all applicable local electrical codes, ordinances, and the National Electrical Code (NEC).

For your safety and proper operation of luminaire, read and understand all instructions completely before commencing installation of this luminaire.

Carefully unpack the luminaire and inspect for damage.

Use the enclosed gloves when handling the luminaire.

This product is rated for one (1) 60W max E26 R14 bulb (or E27 spotlight bulb, depending on your location).

NOTE: THIS LUMINAIRE REQUIRES A 2"X4" SINGLE GANG JUNCTION BOX.

Save these instructions for future reference.

CAUTION

This product should be installed only by a licensed electrician.

WARNING

The electricity must be turned off at the main fuse box before installing this luminaire. Turning power off using the light switch may not be sufficient to prevent electrical shock.

Use UL listed wire nuts for all wiring connections in this luminaire. Wrap wire nut connections with UL listed electrical tape.

INCLUDED COMPONENTS FOR INSTALLATION

	(1) luminaire body
	(1) mounting plate with socket
	(1) glass lens
	(1) E26/E27 bulb
	(2) 1-1/2” #8 x 32 machine screws
	(2) 1/2” #8 x 32 set screws
	(3) wire nuts
	(1) Allen wrench

WORKSTEAD

INSTALLATION INSTRUCTIONS | PARK II

ASSEMBLY AND MOUNTING INSTRUCTIONS

STEP 1 | CUT POWER
Shut off the main electrical supply to the junction box from the fuse box/circuit breaker. Turning power off at the switch is not sufficient.

STEP 2 | CONNECT WIRES
NOTE: THIS LUMINAIRE REQUIRES A 2"X4" SINGLE GANG JUNCTION BOX. Locate the junction box in the wall. Using the wire nuts provided, make electrical connections by following the electrical configuration table. *(Fig. 1)* Ensure that all electrical connections are wrapped with UL listed electrical tape. Carefully tuck the wiring into the junction box.

STEP 3 | ATTACH MOUNTING PLATE
Attach the mounting plate provided to the junction box using the 1-1/2" #8 x 32 machine screws provided. *(Fig. 2)*

STEP 4 | CONNECT DIMMER
Holding the luminaire body near the mounting plate, connect the black wires at the front of the mounting plate to the dimmer wires at the back of the luminaire body using the wire connectors on the dimmer. *(Fig. 3)*

STEP 5 | SECURE LUMINAIRE BODY
Using the Allen wrench provided, thread one of the set screws provided into the upper hole in the body until the set screw is flush with the edge of the body. Hook the set screw onto the upper mounting tab on the mounting plate. Allow the body to rest flush with the wall. Thread the second set screw provided into the lower hole in the body until the set screw is flush with the edge of the body. *(See Fig. 4 on page 4)*

STEP 6 | INSTALL BULB
Install the bulb provided. Return power to the luminaire and turn the dimmer dial to confirm proper function. If further work is needed, be sure to turn off power to luminaire before proceeding.

Fig. 1

FROM SUPPLY	TO LUMINAIRE
Connect black or red (hot) house supply circuit wire to:	Luminaire black wire (hot)
Connect white (neutral) house supply circuit wire to:	Luminaire white wire (neutral)
Connect green insulated or bare copper (ground) house supply circuit wire to:	Luminaire bare copper wire (ground)

Fig. 2

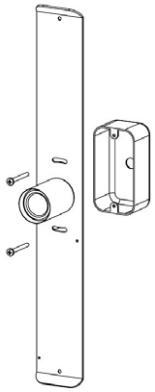

Fig. 3

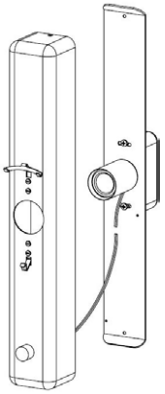

ASSEMBLY AND MOUNTING INSTRUCTIONS

STEP 7 | INSTALL GLASS
Hook the lip of the glass onto the lower clip. Gently pull the glass upward until the lip of the glass clears the upper clip. Hook the lip of the glass onto the upper clip. **NOTE: LOWER CLIP IS SPRING LOADED. TAKE CARE NOT TO ALLOW SPRING TO SNAP BACK INTO PLACE.** *(Fig. 5)*

Fig. 4

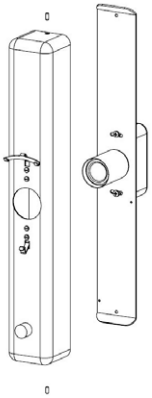
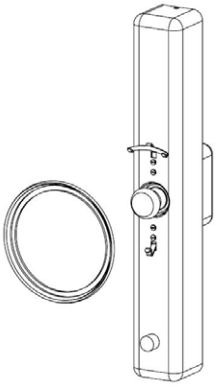
Fig. 5