# WORKSTEAD

## INSTALLATION INSTRUCTIONS | MEGA ADA SCONCE

# WORKSTEAD

## INSTALLATION INSTRUCTIONS | MEGA ADA SCONCE

### GENERAL NOTES

This luminaire is UL, cUL, and CE listed for installation in dry or damp locations.

When installing luminaire, conform to all applicable local electrical codes, ordinances, and the National Electrical Code (NEC).

For your safety and proper operation of luminaire, read and understand all instructions completely before commencing installation of this luminaire.

Carefully unpack the luminaire and inspect for damage.

Use the enclosed gloves when handling the luminaire.

This product is rated for one (1) 60W max E12 G16 bulb (or E14 G50 bulb, depending on your location).

Save these instructions for future reference.

### CAUTION

This product should be installed only by a licensed electrician.

### WARNING

The electricity must be turned off at the main fuse box before installing this luminaire. Turning power off using the light switch may not be sufficient to prevent electrical shock.

Use UL listed wire nuts for all wiring connections in this luminaire. Wrap wire nut connections with UL listed electrical tape.

### INCLUDED COMPONENTS FOR INSTALLATION

| | |
|---|---|
| | (1) luminaire body |
| | (1) reflector |
| | (1) E12/E14 bulb |
| | (2) 1-1/2” #8 x 32 machine screws |
| | (3) wire nuts |

# WORKSTEAD

## INSTALLATION INSTRUCTIONS | MEGA ADA SCONCE

### ASSEMBLY AND MOUNTING INSTRUCTIONS

**STEP 1 | CUT POWER**
Shut off the main electrical supply to the junction box from the fuse box/circuit breaker. Turning power off at the switch is not sufficient.

**STEP 2 | ATTACH BACKPLATE**
Locate the junction box in the wall. Attach the backplate of the luminaire body to the junction box using the 1-1/2" #8 x 32 machine screws provided. *(Fig. 1)*

**STEP 3 | CONNECT WIRES**
Using the wire nuts provided, make electrical connections by following the electrical configuration table. *(Fig. 2)* Ensure that all electrical connections are wrapped with UL listed electrical tape. Carefully tuck the wiring into the junction box.

**STEP 4 | INSTALL BULB**
Install the bulb provided. Return power to the luminaire. If the luminaire is equipped with a dimmer dial, turn the dial to confirm proper function. If further work is needed, be sure to turn off power to luminaire before proceeding.

**STEP 5 | INSTALL REFLECTOR**
Carefully align the coupling of the reflector provided with the post in the backplate. Screw the reflector onto the post. *(Fig. 3)*

**Fig. 1**

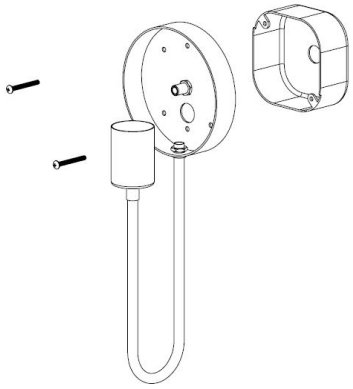

**Fig. 2**

| FROM SUPPLY | TO LUMINAIRE |
|---|---|
| Connect black or red (hot) house supply circuit wire to: | Luminaire black wire (hot) |
| Connect white (neutral) house supply circuit wire to: | Luminaire white wire (neutral) |
| Connect green insulated or bare copper (ground) house supply circuit wire to: | Luminaire bare copper wire (ground) |
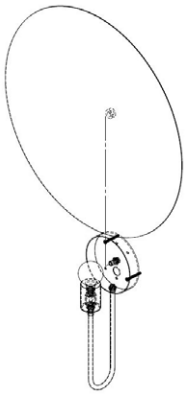
**Fig. 3**