



# WORKSTEAD

## INSTALLATION INSTRUCTIONS | SIGNAL SOLO



### GENERAL NOTES

This luminaire is UL, cUL, and CE listed for installation in dry or damp locations.

When installing luminaire, conform to all applicable local electrical codes, ordinances, and the National Electrical Code (NEC).

For your safety and proper operation of luminaire, read and understand all instructions completely before commencing installation of this luminaire.

Carefully unpack the luminaire and inspect for damage.

Use the enclosed gloves when handling the luminaire.

This product is rated for one (1) 40W max E12 G16.5 bulb (or E14 G50 bulb, depending on your location).

Save these instructions for future reference.

### CAUTION


This product should be installed only by a licensed electrician.

### WARNING

The electricity must be turned off at the main fuse box before installing this luminaire. Turning power off using the light switch may not be sufficient to prevent electrical shock.

Use UL listed wire nuts for all wiring connections in this luminaire. Wrap wire nut connections with UL listed electrical tape.

### INCLUDED COMPONENTS FOR INSTALLATION



(1) luminaire body



(1) mounting plate



(1) glass globe



(1) E12/E14 bulb



(2) lens finials with nylon bushing



(2) 1-1/2" #8 x 32 machine screws



(2) 3/8" #8 x 32 & (2) 1/2" #8 x 32 set screws



(3) wire nuts



(1) Allen wrench

### ASSEMBLY AND MOUNTING INSTRUCTIONS


#### STEP 1 | CUT POWER

Shut off the main electrical supply to the junction box from the fuse box/circuit breaker. Turning power off at the switch is not sufficient.

#### STEP 2 | ATTACH MOUNTING PLATE

Locate the junction box in the wall. Attach the luminaire via the mounting plate to the junction box using the (2) 1-1/2" #8 machine screws provided. (Fig. 1)

Fig. 1

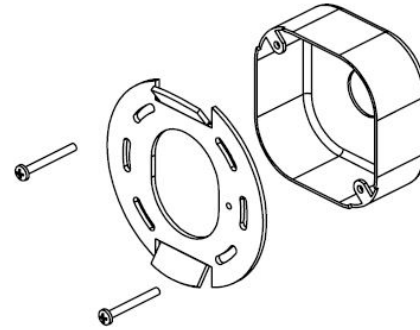

#### STEP 3 | CONNECT WIRES

Using the wire nuts provided, make electrical connections by following the electrical configuration table. (Fig. 2) Ensure that all electrical connections are wrapped with UL listed electrical tape.


Fig. 2

FROM SUPPLY	TO LUMINAIRE
Connect black or red (hot) house supply circuit wire to:	Luminaire black wire (hot)
Connect white (neutral) house supply circuit wire to:	Luminaire white wire (neutral)
Connect green insulated or bare copper (ground) house supply circuit wire to:	Luminaire bare copper wire (ground)

#### STEP 4 | SECURE BACKPLATE

NOTE: 1/2" and 3/8" set screws included for mounting. Utilize the screw that works best for j-box site conditions. Carefully tuck the wiring into the junction box. Using the Allen wrench provided, thread one of the set screws into the upper hole in the backplate until the set screw is flush with the edge of the backplate. Hook the set screw onto the upper mounting tab on the mounting plate. Allow the backplate to rest flush with the wall. Thread the second set screw into the lower hole in the backplate until the set screw is flush with the edge of the backplate. (Fig. 3)

Fig. 3

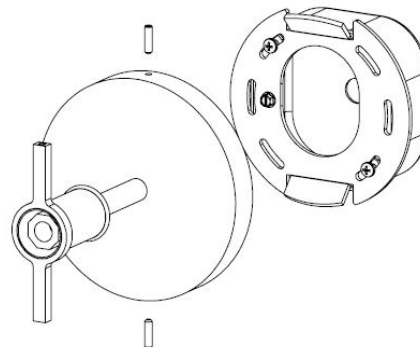

#### STEP 5 | INSTALL BULB

Install the bulb provided. Return power to the luminaire to confirm proper function. If further work is needed, be sure to turn off power to luminaire before proceeding.

### ASSEMBLY AND MOUNTING INSTRUCTIONS

#### STEP 6 | INSTALL GLASS

Angle the glass and slip it over the center hub.  
(Fig. 4)

#### STEP 7 | SECURE GLASS

Straighten the glass and align one hole in the side of the glass with one hole in the center hub. Carefully insert one of the lens finials through the hole in the glass and thread one lens finial provided into the hole in the center hub until the lens is secured. Do not fully thread the lens finial into the center hub. Repeat on the other side of the lens. Once both lens finials are threaded, continue threading them both until they are tightened against the glass. CAUTION: DO NOT OVERTIGHTEN. (Fig. 5)

Fig. 4

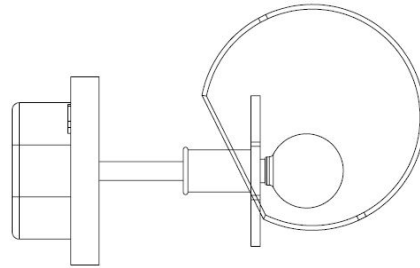


Fig. 5

