

WORKSTEAD

INSTALLATION INSTRUCTIONS | PARK I



GENERAL NOTES

This luminaire is UL, cUL, and CE listed for installation in dry or damp locations.

When installing luminaire, conform to all applicable local electrical codes, ordinances, and the National Electrical Code (NEC).

For your safety and proper operation of luminaire, read and understand all instructions completely before commencing installation of this luminaire.

Carefully unpack the luminaire and inspect for damage.

Use the enclosed gloves when handling the luminaire.

This product is rated for one (1) 60W max E26 R14 bulb (or E27 spotlight bulb, depending on your location).

Save these instructions for future reference.

CAUTION


This product should be installed only by a licensed electrician.

WARNING

The electricity must be turned off at the main fuse box before installing this luminaire. Turning power off using the light switch may not be sufficient to prevent electrical shock.

Use UL listed wire nuts for all wiring connections in this luminaire. Wrap wire nut connections with UL listed electrical tape.

INCLUDED COMPONENTS FOR INSTALLATION



(1) luminaire body



(1) mounting plate with socket



(1) glass lens with studs



(1) E26/E27 bulb



(2) 1-1/2" #8 x 32 machine screws



(2) 1/2" #8 x 32 set screws



(3) wire nuts



(2) Allen wrenches

ASSEMBLY AND MOUNTING INSTRUCTIONS

STEP 1 | CUT POWER

Shut off the main electrical supply to the junction box from the fuse box/circuit breaker. Turning power off at the switch is not sufficient.

STEP 2 | CONNECT WIRES

Using the wire nuts provided, make electrical connections by following the electrical configuration table. (Fig. 1) Ensure that all electrical connections are wrapped with UL listed electrical tape. Carefully tuck the wiring into the junction box.


Fig. 1

FROM SUPPLY	TO LUMINAIRE
Connect black or red (hot) house supply circuit wire to:	Luminaire black wire (hot)
Connect white (neutral) house supply circuit wire to:	Luminaire white wire (neutral)
Connect green insulated or bare copper (ground) house supply circuit wire to:	Luminaire bare copper wire (ground)

STEP 3 | ATTACH MOUNTING PLATE

Locate the junction box in the wall. Attach the mounting plate provided to the junction box using the 1-1/2" #8 x 32 machine screws provided. (Fig. 2) Ensure the mounting tabs are aligned vertically as shown in Fig. 2 to correspond with the proper orientation of the backplate.

Fig. 2

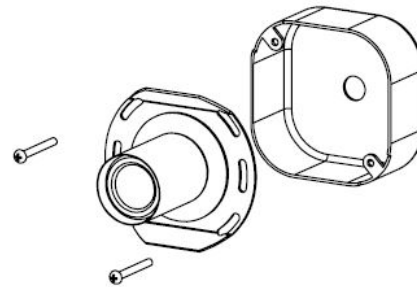


STEP 4 | INSTALL BULB

Install the bulb provided. Return power to the luminaire to confirm proper function. If further work is needed, be sure to turn off power to luminaire before proceeding.

STEP 5 | SECURE LUMINAIRE BODY

Using the larger Allen wrench provided, thread one of the set screws provided into the upper hole in the body until the set screw is flush with the edge of the body. Hook the set screw onto the upper mounting tab on the mounting plate. Allow the body to rest flush with the wall. Thread the second set screw provided into the lower hole in the body until the set screw is flush with the edge of the body. (Fig. 3)

Fig. 3

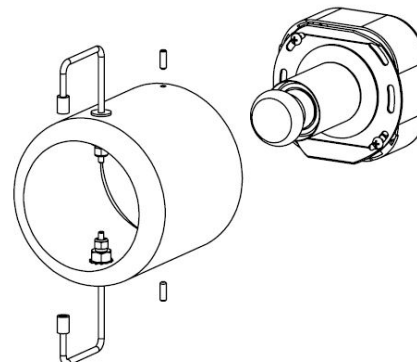

ASSEMBLY AND MOUNTING INSTRUCTIONS

STEP 6 | CUT POWER

Once proper function is confirmed, shut off the main electrical supply to the junction box from the fuse box/circuit breaker. Turning power off at the switch is not sufficient.

STEP 7 | INSTALL GLASS

Position the glass so that the studs on the glass align with the caps on the ends of each arm on the body. Tighten the caps onto the threaded studs of the glass until the caps are hand-tight. (Fig. 4) Using the smaller Allen wrench provided, tighten both set screws on each cap to secure glass in the desired position. (Fig. 5) CAUTION: DO NOT OVER-TIGHTEN. Return power to luminaire.

Fig. 4

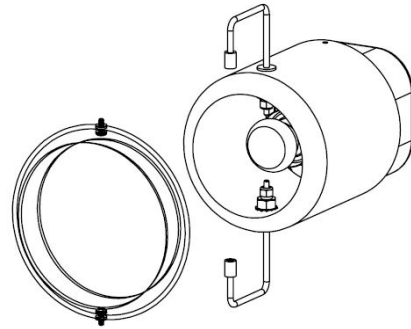


Fig. 5

