

WORKSTEAD



INSTALLATION INSTRUCTIONS | TUBE PENDANT



INSTALLATION INSTRUCTIONS | TUBE PENDANT

GENERAL NOTES

This luminaire is UL listed for installation in dry or damp locations.

When installing luminaire, conform to all applicable local electrical codes, ordinances, and the National Electrical Code (NEC).

For your safety and proper operation of luminaire, read and understand all instructions completely before commencing installation of this luminaire.

Carefully unpack the luminaire and inspect for damage.

Use the enclosed gloves when handling the luminaire.

This product uses low voltage, integrated LED lighting.

Save these instructions for future reference.

CAUTION

This product should be installed only by a licensed electrician.

WARNING


The electricity must be turned off at the main fuse box before installing this luminaire. Turning power off using the light switch may not be sufficient to prevent electrical shock.

Use UL listed wire nuts for all wiring connections in this luminaire. Wrap wire nut connections with UL listed electrical tape.

INCLUDED COMPONENTS FOR INSTALLATION




(1) luminaire body



(1) stem assembly



(1) mounting plate



(2) ball assemblies



(1) tube of Loctite



(2) 1-1/2" #8 x 32 machine screws



(2) 3/8" #8 x 32 & (2) 1/2" #8 x 32 set screws



(3) wire nuts



(1) Allen wrench

ASSEMBLY AND MOUNTING INSTRUCTIONS


STEP 1 | CUT POWER

Shut off the main electrical supply to the junction box from the fuse box/circuit breaker. Turning power off at the switch is not sufficient.

STEP 2 | FEED WIRES

Feed the wires up the suspension stem/canopy assembly. Once the wires exit the top of the suspension assembly, apply one *small* drop of the Loctite provided onto the threads of the nipple at the top of the luminaire body, thread the suspension assembly onto the threaded nipple, and ensure the connection is tight. (Fig. 1)


Fig. 1

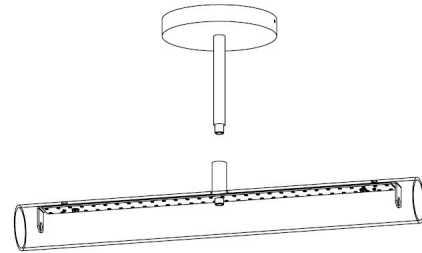

STEP 2 | ATTACH MOUNTING PLATE

Locate the junction box in the ceiling. Attach the mounting plate provided to the junction box using the 1-1/2" #8 x 32 machine screws provided. (Fig. 2) NOTE: Ensure the mounting tabs are aligned to correspond with the proper orientation of the canopy.

Fig. 2

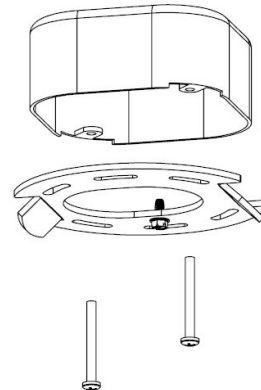

STEP 4 | CONNECT WIRES

Using the wire nuts provided, make electrical connections by following the electrical configuration table. (Fig. 3) Ensure that all electrical connections are wrapped with UL listed electrical tape.

Fig. 3

FROM SUPPLY	TO LUMINAIRE
Connect black or red (hot) house supply circuit wire to:	Luminaire black wire (hot)
Connect white (neutral) house supply circuit wire to:	Luminaire white wire (neutral)
Connect green insulated or bare copper (ground) house supply circuit wire to:	Luminaire bare copper wire (ground)

STEP 5 | SECURE CANOPY

NOTE: 1/2" and 3/8" set screws included for mounting. Utilize the screw that works best for j-box site conditions.

Carefully tuck the wiring into the junction box. Using the Allen wrench provided, thread one of the set screws into one of the holes in the canopy until the set screw is flush with the edge of the canopy. Hook the set screw onto one of the mounting tabs on the mounting plate. Hold the canopy flush against the mounting surface and thread the second set screw into the other hole in the canopy until the set screw is flush with the edge of the canopy. (See Fig. 4 on page 4)

WORKSTEAD



INSTALLATION INSTRUCTIONS | TUBE PENDANT

ASSEMBLY AND MOUNTING INSTRUCTIONS

STEP 6 | CONFIRM FUNCTION

Return power to the luminaire to confirm proper function. If further work is needed, be sure to turn off power to luminaire before proceeding. Once proper function is confirmed, cut power by repeating Step 1.

STEP 7 | INSTALL BALL ASSEMBLIES

Thread the ball assemblies provided into the metal bracket at each end of the glass. (Fig. 5)
Return power to the luminaire.

Fig. 4

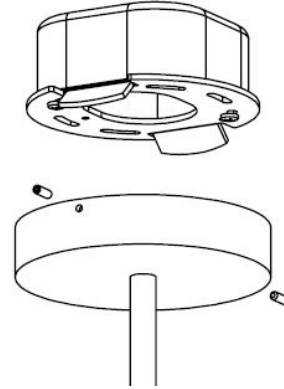


Fig. 5

