

WORKSTEAD

INSTALLATION INSTRUCTIONS | INDUSTRIAL WALL LAMP - HARDWIRED



GENERAL NOTES

This luminaire is UL, cUL, and CE listed for installation in dry or damp locations.

When installing luminaire, conform to all applicable local electrical codes, ordinances, and the National Electrical Code (NEC).

For your safety and proper operation of luminaire, read and understand all instructions completely before commencing installation of this luminaire.

Carefully unpack the luminaire and inspect for damage.

Use the enclosed gloves when handling the luminaire.

This product is rated for one (1) 60W max E26 G25 bulb (or E27 G80 bulb, depending on your location).

NOTE: A TWO-PERSON INSTALLATION IS REQUIRED.

Save these instructions for future reference.

CAUTION

This product should be installed only by a licensed electrician.

WARNING

The electricity must be turned off at the main fuse box before installing this luminaire. Turning power off using the light switch may not be sufficient to prevent electrical shock. Use UL listed wire nuts for all wiring connections in this luminaire. Wrap wire nut connections with UL listed electrical tape.

INCLUDED COMPONENTS FOR INSTALLATION



(1) wired backplate with fixed arm



(1) wired movable arm



(1) shade




(1) clamp



(1) mounting plate



(1) E26/E27 bulb



(2) acorn nuts



(4) 1-1/2" #8 x 32 machine screws



(3) wire nuts

ASSEMBLY AND MOUNTING INSTRUCTIONS

STEP 1 | CUT POWER

Shut off the main electrical supply to the junction box from the fuse box/circuit breaker. Turning power off at the switch is not sufficient.

STEP 2 | INSTALL SHADE

Attach the shade to the movable arm and secure it by tightening the three thumb screws located in the shade collar. Adjust the shade to the desired position using the swivel turn key located at the top of the arm. (Fig. 1).

STEP 3 | ATTACH MOUNTING PLATE

Locate the junction box in the wall. Install (2) 1-1/2" #8 machine screws provided into the outer holes of the mounting plate, from the back side, to act as mounting studs. Attach the mounting plate provided to the junction box using (2) 1-1/2" #8 x 32 machine screws provided, ensuring that the mounting studs are set level to align with the holes in the backplate. (Fig. 2)

STEP 4 | FEED WIRES

NOTE: A TWO-PERSON INSTALLATION IS REQUIRED

INSTALLER 1 holds the movable arm, supporting the shade. INSTALLER 2 feeds the wires from the end of the movable arm through the fixed arm and backplate.

STEP 4 | CONNECT WIRES

NOTE: A TWO-PERSON INSTALLATION IS REQUIRED

INSTALLER 1 continues to hold the movable arm, supporting the shade. INSTALLER 2 makes electrical connections, using the wire nuts provided, by following the electrical configuration table. (Fig. 3) Ensure that all electrical connections are wrapped with UL listed electrical tape.

Fig. 1

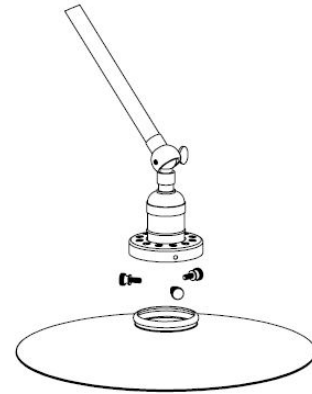


Fig. 2

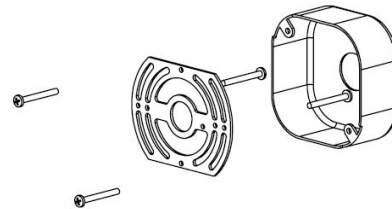


Fig. 3

FROM SUPPLY	TO LUMINAIRE
Connect black or red (hot) house supply circuit wire to:	Luminaire black wire (hot)
Connect white (neutral) house supply circuit wire to:	Luminaire white wire (neutral)
Connect green insulated or bare copper (ground) house supply circuit wire to:	Luminaire bare copper wire (ground)


ASSEMBLY AND MOUNTING INSTRUCTIONS

STEP 5 | SECURE BACKPLATE

NOTE: A TWO-PERSON INSTALLATION IS REQUIRED

INSTALLER 1 holds the movable arm, supporting the shade. INSTALLER 2 carefully tucks the wiring into the junction box, carefully aligns the two holes in the backplate with the mounting stud screws, slips the backplate over those screws, then attaches and tightens the two acorn nuts provided to those screws to secure the luminaire to the wall. **NOTE:** Tighten acorn nuts by hand or using soft-touch pliers. (Fig. 4)

Fig. 4

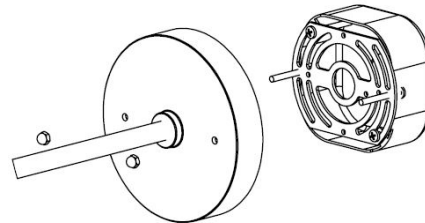


STEP 6 | INSTALL CLAMP

NOTE: A TWO-PERSON INSTALLATION IS REQUIRED.

Determine the desired positioning of the movable arm/shade assembly. INSTALLER 1 holds the movable arm in the desired position, supporting the shade. INSTALLER 2 loosens both ends of the clamp and slides one end onto the fixed rod. (Fig. 5) **CAUTION: THE CLAMP MUST BE ATTACHED IN THE MIDDLE OF THE ROD, CENTERED BETWEEN THE END OF THE ROD AND THE BACKPLATE.**

Fig. 5

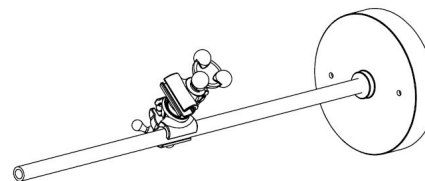


STEP 7 | INSTALL MOVABLE ARM

NOTE: A TWO-PERSON INSTALLATION IS REQUIRED.

INSTALLER 1 slides the arm/shade assembly into the other end of the clamp. (Fig. 6) INSTALLER 2 fully tightens both ends of the clamp. **CAUTION: THE CLAMP MUST BE ATTACHED IN THE MIDDLE OF THE MOVABLE ARM, CENTERED BETWEEN THE END OF THE MOVABLE ARM AND THE SOCKET.**

Fig. 6

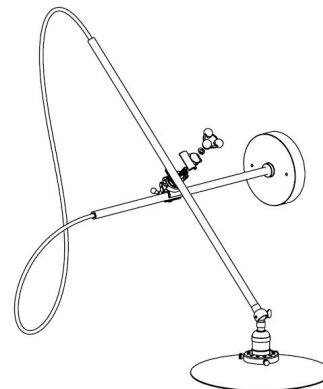

CAUTION: IF REPOSITIONING IS NEEDED, FULLY LOOSEN BOTH ENDS OF THE CLAMP BEFORE MAKING ANY ADJUSTMENTS AND START STEPS 6 AND 7 OVER. DO NOT ADJUST ARMS WHILE CLAMP IS TIGHT OR THE FINISH MAY BE DAMAGED.

STEP 8 | INSTALL BULB

Install the bulb provided. Return power to the luminaire to confirm proper function. If further work is needed, be sure to turn off power to luminaire before proceeding.

WORKSTEAD

INSTALLATION INSTRUCTIONS | INDUSTRIAL WALL LAMP - PLUG IN



WORKSTEAD



INSTALLATION INSTRUCTIONS | INDUSTRIAL WALL LAMP - PLUG IN

GENERAL NOTES

This luminaire is UL, cUL, and CE listed for installation in dry or damp locations.

When installing luminaire, conform to all applicable local electrical codes, ordinances, and the National Electrical Code (NEC).

For your safety and proper operation of luminaire, read and understand all instructions completely before commencing installation of this luminaire.

Carefully unpack the luminaire and inspect for damage.

Use the enclosed gloves when handling the luminaire.

This product is rated one (1) 60W max E26 G25 bulb (or E27 G80 bulb, depending on your location).

NOTE: A TWO-PERSON INSTALLATION IS REQUIRED.

Save these instructions for future reference.

CAUTION

This product should be installed only by a licensed electrician.

WARNING

This luminaire uses a polarized plug. Do not attempt to defeat this safety feature.

INCLUDED COMPONENTS FOR INSTALLATION



(1) fixed rod with mounting plate



(1) movable arm with cord and plug



(1) shade



(1) clamp



(1) E26/E27 bulb



(3) slotted flat head wood screws


ASSEMBLY AND MOUNTING INSTRUCTIONS

STEP 1 | ATTACH FIXED ROD

Using the provided mounting plate as a template, attach the mounting plate to the wall using the slotted flat head wood screws provided. Ensure the wood screws are installed into a stud or other appropriate structural material. (Fig. 1)

NOTE: Anchors are not included. If you are not installing the mounting plate into a stud, source appropriate anchors according to wall type.


Fig. 1

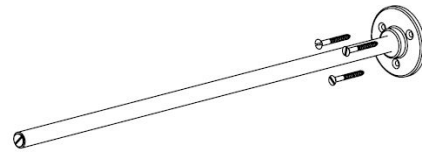

STEP 2 | INSTALL SHADE

Attach the shade to the movable arm and secure it by tightening the three thumb screws located in the shade collar. Adjust the shade to the desired position using the swivel turn key located at the top of the arm. (Fig. 2).

Fig. 2

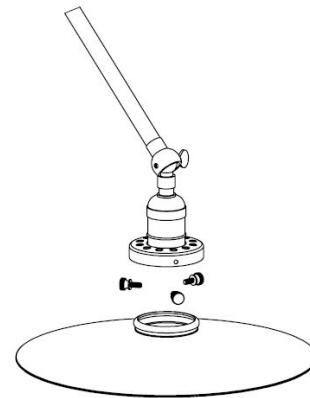


STEP 3 | INSTALL CLAMP

NOTE: A TWO-PERSON INSTALLATION IS REQUIRED.

Determine the desired positioning of the movable arm/shade assembly. INSTALLER 1 holds the movable arm in the desired position, supporting the shade. INSTALLER 2 loosens both ends of the clamp and slides one end onto the FIXED rod.

(Fig. 3) **CAUTION: THE CLAMP MUST BE ATTACHED IN THE MIDDLE OF THE ROD, CENTERED BETWEEN THE END OF THE ROD AND THE MOUNTING PLATE.**

Fig. 3

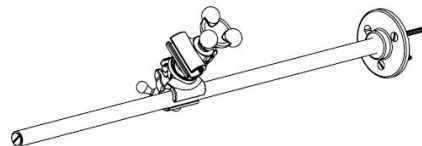

STEP 4 | INSTALL MOVABLE ARM

NOTE: A TWO-PERSON INSTALLATION IS REQUIRED.

INSTALLER 1 slides the arm/shade assembly into the other end of the clamp. (See Fig. 4 on page 4)

INSTALLER 2 fully tightens both ends of the clamp. **CAUTION: THE CLAMP MUST BE ATTACHED IN THE MIDDLE OF THE MOVABLE ARM, CENTERED BETWEEN THE END OF THE MOVABLE ARM AND THE SOCKET.**

CAUTION: IF REPOSITIONING IS NEEDED, FULLY LOOSEN BOTH ENDS OF THE CLAMP BEFORE MAKING ANY ADJUSTMENTS AND START STEPS 3 AND 4 OVER. DO NOT ADJUST ARMS WHILE CLAMP IS TIGHT OR THE FINISH MAY BE DAMAGED.

ASSEMBLY AND MOUNTING INSTRUCTIONS

STEP 5 | INSTALL BULB

Install the bulb provided. Plug in luminaire to confirm proper function. If further work is needed, be sure to unplug luminaire before proceeding.

Fig. 4

