WORKSTEAD

INSTALLATION INSTRUCTIONS | MONUMENTAL SCONCE / FLUSH MOUNT - SPHERE I

WORKSTEAD

INSTALLATION INSTRUCTIONS | MONUMENTAL SCONCE / FLUSH MOUNT - SPHERE I

GENERAL NOTES

This luminaire is UL, cUL, and CE listed for installation in dry or damp locations.

When installing luminaire, conform to all applicable local electrical codes, ordinances, and the National Electrical Code (NEC).

For your safety and proper operation of luminaire, read and understand all instructions completely before commencing installation of this luminaire.

Carefully unpack the luminaire and inspect for damage.

Use the enclosed gloves when handling the luminaire.

This product is rated for one (1) 40W max E26 G16 bulb (or E27 G50 bulb, depending on your location).

Save these instructions for future reference.

CAUTION

This product should be installed only by a licensed electrician.

WARNING

The electricity must be turned off at the main fuse box before installing this luminaire. Turning power off using the light switch may not be sufficient to prevent electrical shock.

Use UL listed wire nuts for all wiring connections in this luminaire. Wrap wire nut connections with UL listed electrical tape.

INCLUDED COMPONENTS FOR INSTALLATION

	(1) luminaire body
	(1) E26/E27 bulb
	(2) 1-1/2” #8 x 32 machine screws
	(3) wire nuts

WORKSTEAD

INSTALLATION INSTRUCTIONS | MONUMENTAL SCONCE / FLUSH MOUNT - SPHERE I

ASSEMBLY AND MOUNTING INSTRUCTIONS

STEP 1 | CUT POWER
Shut off the main electrical supply to the junction box from the fuse box/circuit breaker. Turning power off at the switch is not sufficient.

STEP 2 | REMOVE DOME
Unscrew the small spinning on the face of the luminaire in order to access the mounting holes. Set it aside for re-installation in a later step.

STEP 3 | CONNECT WIRES
Locate the junction box in the wall. Using the wire nuts provided, make electrical connections by following the electrical configuration table. *(Fig. 1)* Ensure that all electrical connections are wrapped with UL listed electrical tape.

STEP 4 | ATTACH LUMINAIRE BODY
Attach the luminaire to the junction box using the (2) 1-1/2" #8 machine screws provided. *(Fig. 2)*

STEP 5 | REINSTALL DOME
Thread the small spinning removed in step 2 back onto the exposed threaded socket cup until it is hand-tight against the face of the luminaire.

STEP 6 | INSTALL BULB
Install the bulb provided. Return power to the luminaire to confirm proper function. If further work is needed, be sure to turn off power to luminaire before proceeding.

Fig. 1

FROM SUPPLY	TO LUMINAIRE
Connect black or red (hot) house supply circuit wire to:	Luminaire black wire (hot)
Connect white (neutral) house supply circuit wire to:	Luminaire white wire (neutral)
Connect green insulated or bare copper (ground) house supply circuit wire to:	Luminaire bare copper wire (ground)
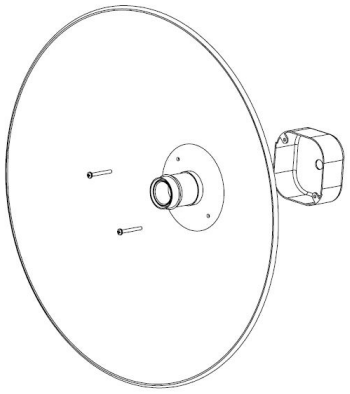
Fig. 2