WORKSTEAD

INSTALLATION INSTRUCTIONS | TRELLIS PENDANT SMALL

WORKSTEAD

INSTALLATION INSTRUCTIONS | TRELLIS PENDANT SMALL

GENERAL NOTES

This luminaire is UL, cUL, and CE listed for installation in dry or damp locations.

When installing luminaire, conform to all applicable local electrical codes, ordinances, and the National Electrical Code (NEC).

For your safety and proper operation of luminaire, read and understand all instructions completely before commencing installation of this luminaire.

Carefully unpack the luminaire and inspect for damage.

Use the enclosed gloves when handling the luminaire.

This product is rated for one (1) 40W max E12 G16.5 bulb (or E14 G50 bulb, depending on your location).

NOTE: A TWO-PERSON INSTALLATION IS REQUIRED.

Save these instructions for future reference.

CAUTION

This product should be installed only by a licensed electrician.

WARNING

The electricity must be turned off at the main fuse box before installing this luminaire. Turning power off using the light switch may not be sufficient to prevent electrical shock.

Use UL listed wire nuts for all wiring connections in this luminaire. Wrap wire nut connections with UL listed electrical tape.

INCLUDED COMPONENTS FOR INSTALLATION

	(1) luminaire body
	(1) suspension stem
	(1) mounting plate
	(1) canopy
	(4) glass lens panels
	(1) bottom panel
	(4) thumbscrews
	(1) E26/E27 bulb
	(2) 1-1/2” #8 x 32 machine screws
	(3) wire nuts
	(1) Allen wrench

WORKSTEAD

INSTALLATION INSTRUCTIONS | TRELLIS PENDANT SMALL

ASSEMBLY AND MOUNTING INSTRUCTIONS

STEP 1 | CUT POWER
Shut off the main electrical supply to the junction box from the fuse box/circuit breaker. Turning power off at the switch is not sufficient.

STEP 2 | ATTACH MOUNTING PLATE
Locate the junction box in the ceiling. Attach the mounting plate to the junction box using the (2) 1-1/2" #8 machine screws provided. *(Fig. 1)*

STEP 3 | FEED WIRES
Feed the wires up the suspension stem and attach the hooks on the stem onto the loops at the top of the luminaire body and the bottom of the canopy. Feed the wires through the canopy loop into the canopy. *(Fig. 2)*

STEP 4 | CONNECT WIRES
NOTE: A TWO-PERSON INSTALLATION IS REQUIRED.
Locate the junction box in the ceiling. INSTALLER 1 holds the luminaire in place near the junction box. Using the wire nuts provided, INSTALLER 2 makes electrical connections by following the electrical configuration table. *(Fig. 3)* Ensure that all electrical connections are wrapped with UL listed electrical tape.

STEP 5 | SECURE CANOPY
NOTE: A TWO-PERSON INSTALLATION IS REQUIRED.
INSTALLER 1 raises the canopy to the mounting plate and holds it in place. INSTALLER 2 secures the canopy to the mounting plate by threading the (4) thumbscrews provided into the holes in the canopy. Ensure all thumbscrews are fully tightened before INSTALLER 1 removes support. NOTE: Tighten thumbscrews by hand. *(See Fig. 4 on page 4)*

STEP 6 | INSTALL BULB
Install the bulb provided. Return power to the luminaire. If further work is needed, be sure to turn off power to luminaire before proceeding.

Fig. 1

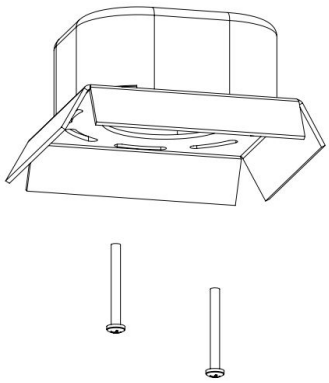

Fig. 2

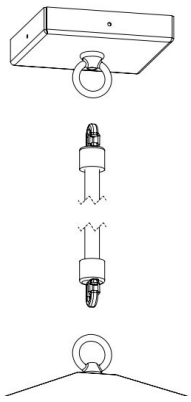

Fig. 3

FROM SUPPLY	TO LUMINAIRE
Connect black or red (hot) house supply circuit wire to:	Luminaire black wire (hot)
Connect white (neutral) house supply circuit wire to:	Luminaire white wire (neutral)
Connect green insulated or bare copper (ground) house supply circuit wire to:	Luminaire bare copper wire (ground)

WORKSTEAD

INSTALLATION INSTRUCTIONS | TRELLIS PENDANT SMALL

ASSEMBLY AND MOUNTING INSTRUCTIONS

STEP 7 | INSTALL GLASS
Remove the bulb and insert each glass lens panel through the open bottom of the luminaire. Align the lens panels within each body frame and secure by gently bending the retention tabs over the edges of the lens panel. *(Fig. 5)* Reinstall the bulb.

STEP 8 | INSTALL BOTTOM PANEL
Angle the bottom panel and insert it through the open bottom of the luminaire. Rest it on the inside of the bottom of the luminaire and secure it by gently bending the retention tabs over the edges of the bottom panel. *(Fig. 6)*

STEP 9 | OPTIONAL - ADJUST ORIENTATION
IF DESIRED, after luminaire is installed, minor adjustments to the orientation can be achieved by using the Allen wrench provided to loosen the set screw in one of the suspension hooks, rotating the luminaire body, and retightening the set screw in the suspension hook. NOTE: DO NOT ROTATE LUMINAIRE BODY MORE THAN 90°.

Fig. 4

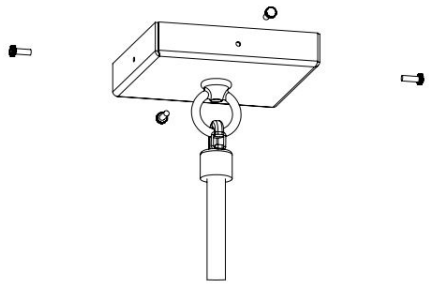

Fig. 5

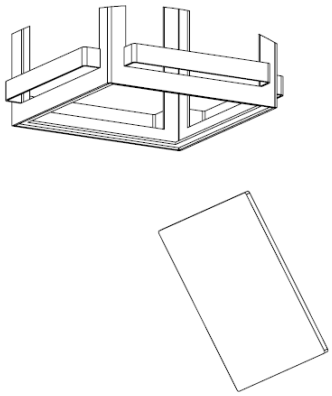
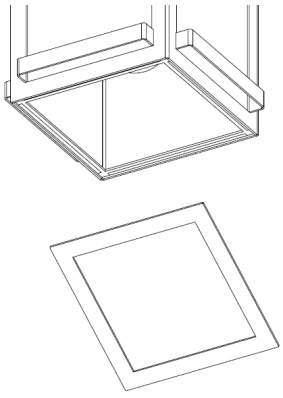
Fig. 6